

FOR GENERAL-PURPOSE AMPLIFIER APPLICATIONS

**8-LEAD SUBMINIATURE
MEDIUM MU**

**SHOCK, VIBRATION RATINGS
HEATER-CYCLING RATING**

DESCRIPTION AND RATING

The 6111 is a subminiature medium-mu twin triode for use in general-purpose amplifier applications. Each section has an individual cathode and is electrically independent. The tube may also be used as a combined oscillator and mixer in high-frequency circuits.

The 6111 is a special-quality tube intended for use in critical industrial and military applications in which operational dependability is of primary importance. Features of the tube include a high degree of mechanical strength and a heater-cathode construction capable of withstanding many-thousand cycles of intermittent operation. When used in on-off control applications, the tube will maintain its emission capabilities after long periods of operation under cutoff conditions.

GENERAL

ELECTRICAL

Cathode—Coated Unipotential

Heater Voltage, AC or DC..... $6.3 \pm 5\%$ Volts
Heater Current..... 0.3 Amperes

Direct Interelectrode Capacitances

| | With Shield* | Without Shield |
|----------------------------------|--------------|------------------------|
| Grid to Plate, Each Section..... | 1.4 | 1.5 $\mu\mu\text{f}$ |
| Input, Each Section..... | 2.1 | 1.9 $\mu\mu\text{f}$ |
| Output, Section 1..... | 1.3 | 0.28 $\mu\mu\text{f}$ |
| Output, Section 2..... | 1.4 | 0.32 $\mu\mu\text{f}$ |
| Grid to Grid, maximum..... | 0.010 | 0.011 $\mu\mu\text{f}$ |
| Plate to Plate, maximum..... | 0.3 | 0.5 $\mu\mu\text{f}$ |

*With external shield of 0.405-inch inside diameter connected to cathode of section under test.


MECHANICAL

Mounting Position—Any

Envelope—T-3, Glass

Base—E8-10, Subminiature Button 8-Lead

BASING DIAGRAM

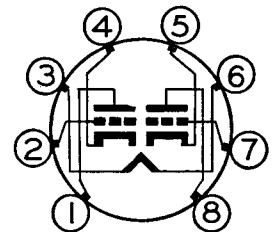


RETMA 8DG

TERMINAL CONNECTIONS

- Lead 1—Plate (Section 2)
- Lead 2—Grid (Section 2)
- Lead 3—Heater
- Lead 4—Cathode (Section 2)
- Lead 5—Cathode (Section 1)
- Lead 6—Heater
- Lead 7—Grid (Section 1)
- Lead 8—Plate (Section 1)

PHYSICAL DIMENSIONS

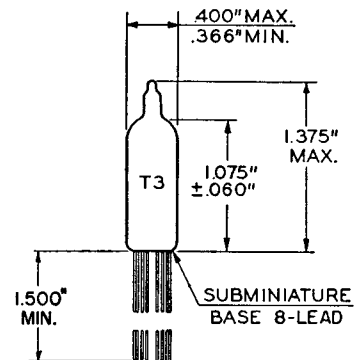

RETMA 3-1

MAXIMUM RATINGS

ABSOLUTE MAXIMUM VALUES, EACH SECTION

| | |
|---|------------------|
| Plate Voltage | 165 Volts |
| Negative DC Grid Voltage | 55 Volts |
| Plate Dissipation | 0.95 Watts |
| DC Plate Current | 22 Milliampères |
| DC Grid Current | 5.5 Milliampères |
| Heater-Cathode Voltage | |
| Heater Positive with Respect to Cathode | 200 Volts |
| Heater Negative with Respect to Cathode | 200 Volts |
| Grid Circuit Resistance | 1.1 Megohms |
| Bulb Temperature at Hottest Point | 220 C |

CHARACTERISTICS AND TYPICAL OPERATION

CLASS A₁ AMPLIFIER, EACH SECTION

| | |
|--|------------------|
| Plate Voltage | 100 Volts |
| Cathode-Bias Resistor | 220 Ohms |
| Amplification Factor | 20 |
| Plate Resistance, approximate | 4000 Ohms |
| Transconductance | 5000 Micromhos |
| Plate Current | 8.5 Milliampères |
| Grid Voltage, approximate | |
| I _b = 10 Microampères | -9.0 Volts |

CLASS A RESISTANCE-COUPLED AMPLIFIER

EACH SECTION

| LOW IMPEDANCE DRIVE (APPROXIMATELY 200 OHMS) | | | | | | | | | | |
|--|-----------------|----------------------------|----------------|------|-----------------------------|----------------|------|-----------------------------|----------------|------|
| R _L | R _{gf} | E _{bb} = 90 Volts | | | E _{bb} = 150 Volts | | | E _{bb} = 225 Volts | | |
| | | R _k | E _o | Gain | R _k | E _o | Gain | R _k | E _o | Gain |
| 0.10 | 0.10 | 2400 | 8.4 | 13 | 2100 | 16 | 14 | 1900 | 25 | 15 |
| 0.10 | 0.24 | 3100 | 12 | 14 | 2800 | 22 | 15 | 2600 | 34 | 16 |
| 0.24 | 0.24 | 6200 | 10 | 14 | 5600 | 19 | 15 | 5200 | 30 | 16 |
| 0.24 | 0.51 | 7800 | 13 | 14 | 7200 | 25 | 15 | 7000 | 38 | 15 |
| 0.51 | 0.51 | 14000 | 11 | 13 | 13000 | 21 | 14 | 12000 | 32 | 15 |
| 0.51 | 1.0 | 19000 | 14 | 13 | 17000 | 26 | 14 | 16000 | 40 | 15 |

| HIGH IMPEDANCE DRIVE (APPROXIMATELY 100K OHMS) | | | | | | | | | | |
|--|-----------------|----------------------------|----------------|------|-----------------------------|----------------|------|-----------------------------|----------------|------|
| R _L | R _{gf} | E _{bb} = 90 Volts | | | E _{bb} = 150 Volts | | | E _{bb} = 225 Volts | | |
| | | R _k | E _o | Gain | R _k | E _o | Gain | R _k | E _o | Gain |
| 0.10 | 0.10 | 3200 | 11 | 13 | 2500 | 21 | 14 | 2100 | 32 | 15 |
| 0.10 | 0.24 | 4200 | 15 | 14 | 3400 | 28 | 15 | 3000 | 43 | 15 |
| 0.24 | 0.24 | 8400 | 13 | 13 | 6800 | 24 | 14 | 6000 | 36 | 15 |
| 0.24 | 0.51 | 10000 | 16 | 13 | 8700 | 29 | 15 | 7800 | 45 | 15 |
| 0.51 | 0.51 | 17000 | 13 | 13 | 15000 | 25 | 14 | 13000 | 38 | 15 |
| 0.51 | 1.0 | 21000 | 17 | 13 | 19000 | 30 | 14 | 17000 | 47 | 15 |

Notes:

- E_o is maximum RMS voltage output for approximately five percent total harmonic distortion.
- Gain is measured for an output voltage of two volts RMS.
- R_k is in ohms; R_L and R_{gf} are in megohms.
- Coupling capacitors (C) should be selected to give desired frequency response. R_k should be adequately by-passed.

CHARACTERISTICS LIMITS

| | Minimum | Maximum | |
|---|---------|---------|-------|
| Heater Current | | | |
| E _f = 6.3 volts | Initial | 280 | 320 |
| | 500-Hr | 276 | 328 |
| Milliamperes | | | |
| Milliamperes | | | |
| Plate Current, Each Section | | | |
| E _f = 6.3 volts, E _b = 100 volts, R _k = 220 ohms (by-passed) | Initial | 6.0 | 11 |
| Milliamperes | | | |
| Plate Current Difference between Sections | | | |
| Difference between plate currents for each section at E _f = 6.3 volts, E _b = 100 volts, R _k = 220 ohms (by-passed) | Initial | | 2.0 |
| Milliamperes | | | |
| Transconductance (1), Each Section | | | |
| E _f = 6.3 volts, E _b = 100 volts, R _k = 220 ohms (by-passed) | Initial | 4100 | 5900 |
| Micromhos | | | |
| Transconductance Change with Heater Voltage, Each Section | | | |
| Difference between Transconductance (1) and Transconductance at E _f = 5.7 volts (other conditions the same) expressed as a percentage of Transconductance (1) | Initial | | 15 |
| | 500-Hr | | 15 |
| Percent | | | |
| Percent | | | |
| Transconductance Change with Operation, Each Section | | | |
| Difference between Transconductance (1) initially and after operation expressed as a percentage of initial value | 500-Hr | | 20 |
| Percent | | | |
| Average Transconductance Change with Operation, Each Section | | | |
| Average of values for "Transconductance Change with Operation" | 500-Hr | | 15 |
| Percent | | | |
| Amplification Factor, Each Section | | | |
| E _f = 6.3 volts, E _b = 100 volts, R _k = 220 ohms (by-passed) | Initial | 17 | 23 |
| Plate Current Cutoff, Each Section | | | |
| E _f = 6.3 volts, E _b = 100 volts, E _c = -9.0 volts | Initial | | 100 |
| Microamperes | | | |
| Interelectrode Capacitances | | | |
| Grid to Plate (g to p), Each Section | Initial | 1.2 | 1.8 |
| Input (g to k + h), Each Section | Initial | 1.4 | 2.4 |
| Output (p to k + h), Section 1 | Initial | 0.20 | 0.36 |
| Output (p to k + h), Section 2 | Initial | 0.22 | 0.42 |
| Grid to Grid (g to g) | Initial | | 0.011 |
| Plate to Plate (p to p) | Initial | | 0.50 |
| Measured without external shield | | | |
| μμf | | | |
| μμf | | | |
| μμf | | | |
| μμf | | | |
| μμf | | | |
| μμf | | | |
| Negative Grid Current, Each Section | | | |
| E _f = 6.3 volts, E _b = 100 volts, R _k = 220 ohms (by-passed), R _g = 1.0 meg | Initial | | 0.3 |
| | 500-Hr | | 0.9 |
| Microamperes | | | |
| Microamperes | | | |
| Heater-Cathode Leakage Current | | | |
| E _f = 6.3 volts, E _{hk} = 100 volts | | | |
| Heater Positive with Respect to Cathode | Initial | | 5.0 |
| | 500-Hr | | 10 |
| Microamperes | | | |
| Microamperes | | | |
| Heater Negative with Respect to Cathode | Initial | | 5.0 |
| | 500-Hr | | 10 |
| Microamperes | | | |
| Microamperes | | | |
| Interelectrode Leakage Resistance | | | |
| E _f = 6.3 volts. Polarity of applied d-c interelectrode voltage is such that no cathode emission results. | | | |
| Grid (Each Section) to All at 100 Volts DC | Initial | 100 | |
| | 500-Hr | 50 | |
| Megohms | | | |
| Megohms | | | |
| Plate (Each Section) to All at 300 Volts DC | Initial | 100 | |
| | 500-Hr | 50 | |
| Megohms | | | |
| Megohms | | | |
| Vibrational Noise Output Voltage, RMS | | | |
| E _f = 6.3 volts, E _{bb} = 100 volts, R _k = 220 ohms (by-passed), R _L = 10,000 ohms, Vibrational acceleration = 15 G at 40 cps | Initial | | 50 |
| Millivolts | | | |
| Grid Emission Current, Each Section | | | |
| E _f = 7.5 volts, E _b = 100 volts, E _{cc} = -9.0 volts, R _g = 1.0 meg | Initial | | 0.5 |
| Microamperes | | | |
| Pulse Cathode Current | | | |
| E _f = 6.0 volts, Pulse of 25 microseconds duration, 200-cycle repetition rate, and 50 volt amplitude is applied to plate and grid tied together. Pulse cathode current is measured for each section with opposite section floating | Initial | 300 | |
| Milliamperes | | | |

SPECIAL TESTS AND RATINGS

Stability Life Test

Statistical sample operated for one hour to evaluate and control initial variations in transconductance.

Survival Rate Life Test

Statistical sample operated for one hundred hours to evaluate and control early-life electrical and mechanical in-operatives.

Heater-Cycling Life Test

Statistical sample operated for 2000 cycles to evaluate and control heater-cathode defects. Conditions of test include $E_f = 7.0$ volts cycled for one minute on and four minutes off, $E_b = E_c = 0$ volts, and $E_{hk} = 140$ volts RMS.

Shock Rating—450 G

Statistical sample subjected to five impact accelerations of 450 G in each of four different positions. The accelerating forces are applied by the Navy-type, High Impact (flyweight) Shock Machine for Electronic Devices or its equivalent.

Fatigue Rating—2.5 G

Statistical sample subjected to vibrational acceleration of 2.5 G for 32 hours in each of three different positions. The sinusoidal vibration is applied at a fixed frequency between 25 and 60 cycles per second.

Altitude Rating—60,000 Feet


Statistical sample subjected to pressure of 55 millimeters of mercury to evaluate and control arcing and corona.

Note: The conditions for some of the indicated tests have deliberately been selected to aggravate tube failures for test and evaluation purposes. In no sense should these conditions be interpreted as suitable circuit operating conditions.

In the design of military equipment employing this tube, reference should be made to the appropriate MIL-E-1 specification.

AVERAGE PLATE CHARACTERISTICS


EACH SECTION

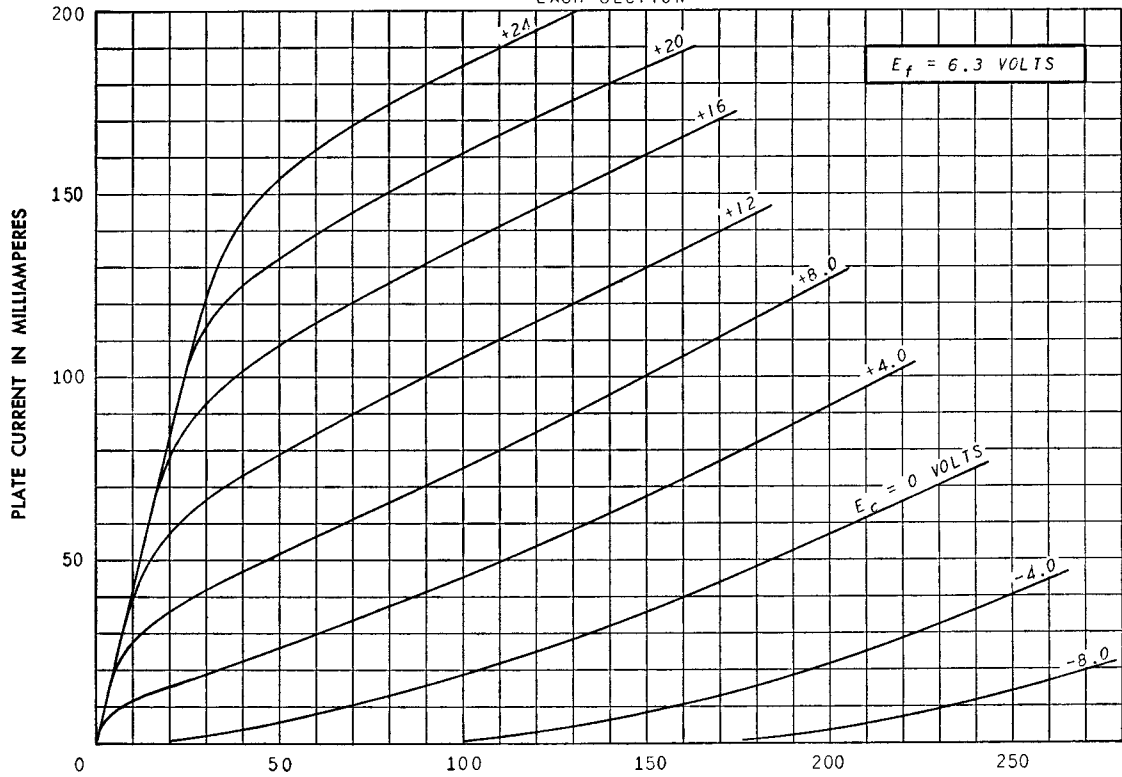

DECEMBER 21, 1956

AVERAGE PLATE CHARACTERISTICS


EACH SECTION

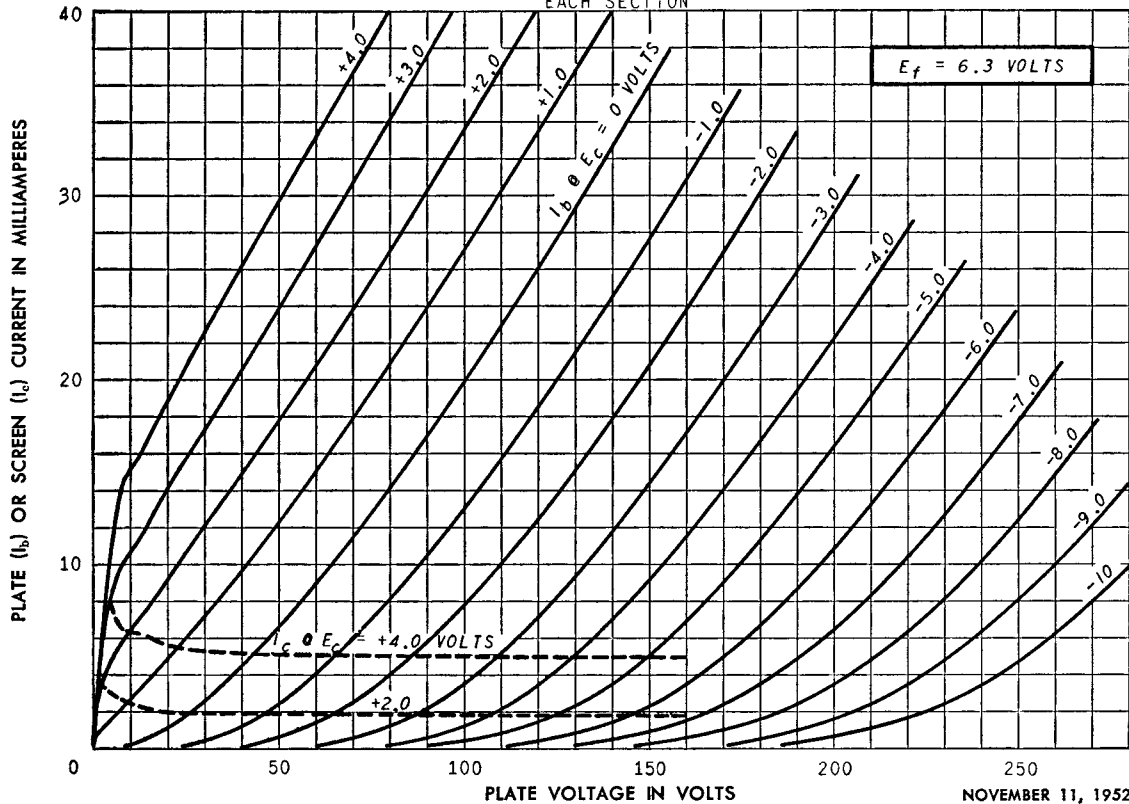

NOVEMBER 11, 1952

AVERAGE CHARACTERISTICS


EACH SECTION

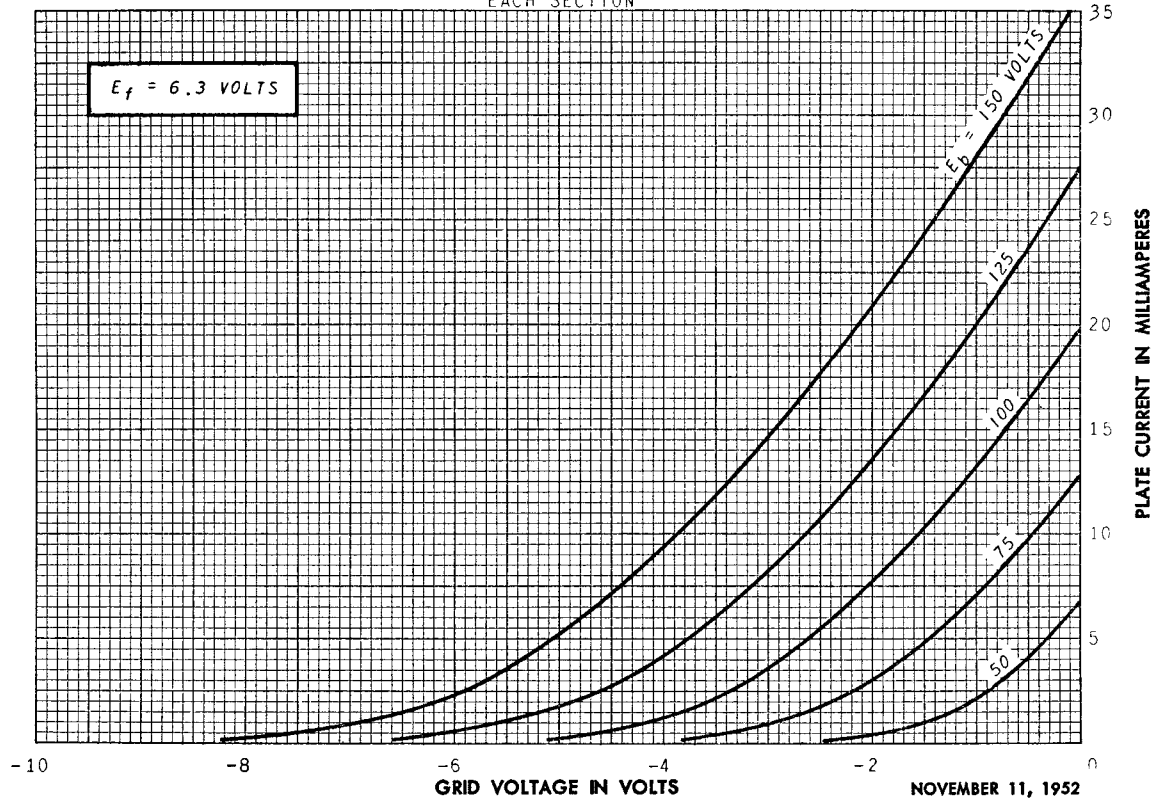

NOVEMBER 11, 1952

AVERAGE CHARACTERISTICS

EACH SECTION

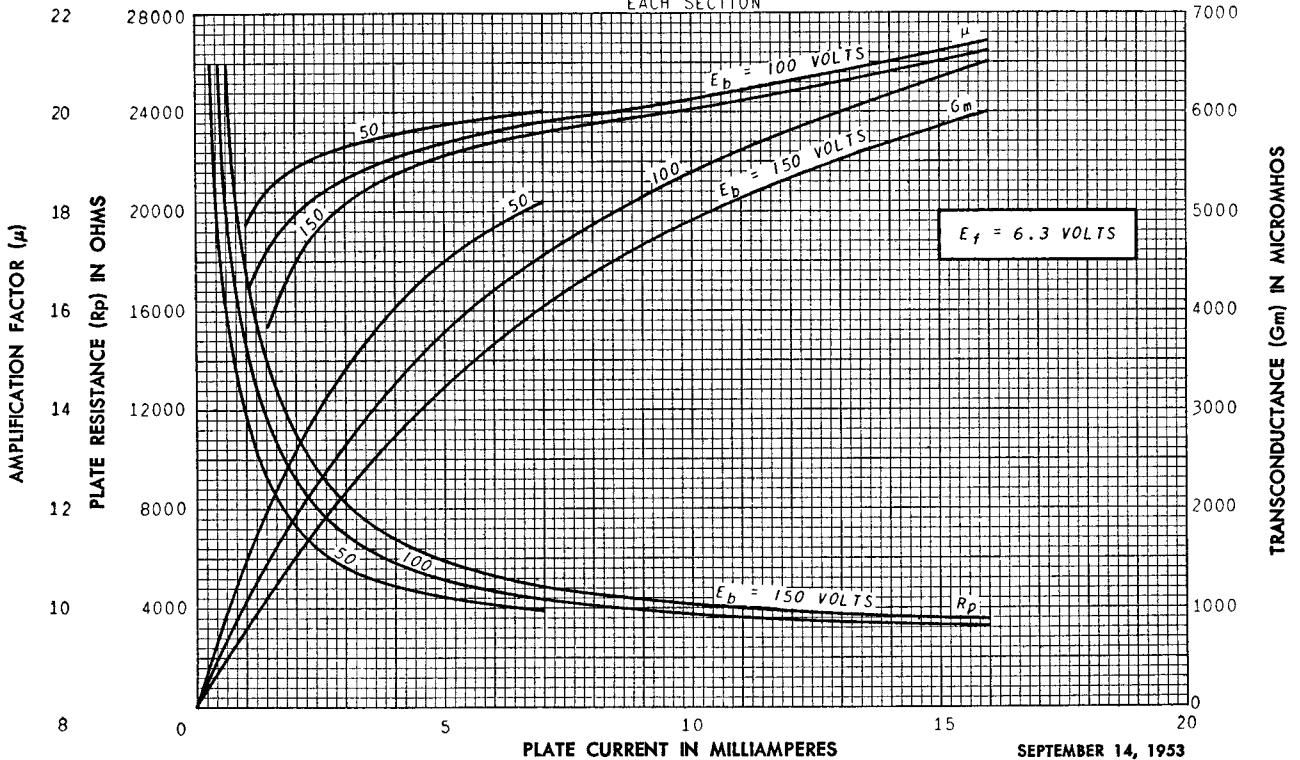

SEPTEMBER 14, 1953

ELECTRONIC COMPONENTS DIVISION



Schenectady 5, N. Y.